


SPLIT COTTER PINS

Our range of cotter pins are stocked in diameters of 1mm-13mm in mild steel and mild steel zinc plated. Stainless and brass stocked in diameters from 1mm-6.3mm.

Our specifications follow DIN94, which is equivalent to ISO1234 and BS1574.

Due to the loose fit required for cotter pins, the metric range doubles for inch sizes.

The length of cotter pins is always measured as the short leg length "L"

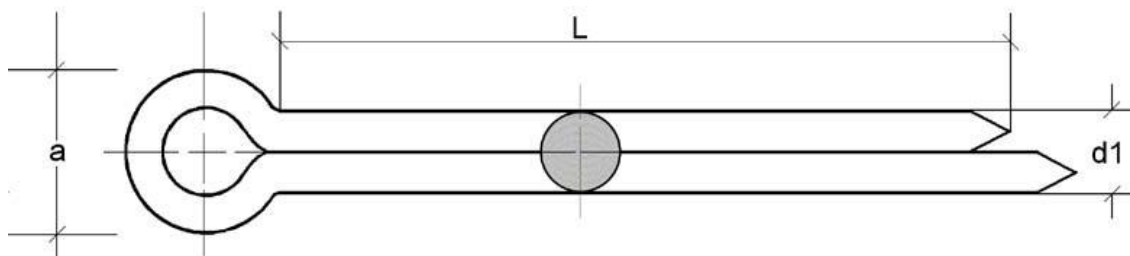

Nominal Diameter mm		1.0	1.2	1.6	2.0	2.5	3.2	4.0	5.0	6.3	8.0	10.0	13.0
Dimension "d1" mm	Max.	0.90	1.00	1.40	1.80	2.30	2.90	3.70	4.60	5.90	7.50	9.5	12.40
	Min.	0.80	1.09	1.30	1.70	2.10	2.70	3.50	4.40	5.70	7.30	9.30	12.10
Dimension "a" mm	Max.	1.80	2.00	2.80	3.60	4.60	5.80	7.40	9.20	11.80	15.00	19.00	24.80
	Min.	1.60	1.70	2.40	3.20	4.00	5.10	6.50	8.00	10.30	13.10	16.60	21.70